



AVANTIX
Zhongshan, Guzhen Town
13242227323

DATA SHEET

Ref: SO.ADJ.8.TM.38.DALI.IN01



AVANTIX SOLO ADJ.8W.T DALI

AVANTIX SOLO IP65 is an adjustable trim-less downlight series has the light that doesn't just illuminate; it highlights, shadows, and evokes emotion.


Arch. Downlight Downlight



Mounting Type	Trim-less
Body Material	DIE-CAST Aluminum
Type Of Painting	Powder Coating
LGP Diffuser / Shade Material	Lens
Light Source	COB
Light Emission	45° , 36° , 24°
Light Control Type	Adjustable
UGR	<19
CRI	≥90 +
Color Temperature (CCT)	3000k, 4000k, 6000k
Lumen / Watt	≥135 Lm/W
Power	≥10W
Power Factor (PF)	>0.9
Operating Temperature	-25 ~ 60°
Life-Span / Warranty	50,000hS
Power Input Type / Driver AC / DC / Hz	AC220V, 50-60Hz
Driver brands	EAGLERISE, LIFUD, EUCHIPS
Power Supply Type	ON/OFF, DALI
Control Gear Type	REMOTE

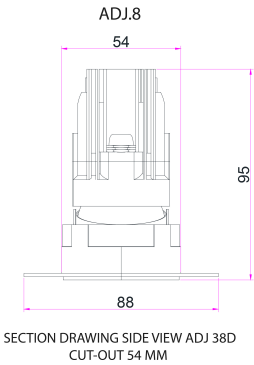

Available Accessories	INNER: DEEP/PINHOLE/SLOTTED/COMB
Application Environment	Residents, Office, Tower, Mall
Power / Dimension Option2	10/15W D73X97MM Cut-Out: D84mm
Power / Dimension Option3	20/25W D84X115MM Cut-Out: D73mm
Note:	Order Code Reference: SO.ADJ+ (P+MT+DEGREE+PT+IN+CCT)
LGP / Led Specs.	OSRAM GWKAFJB9.KM

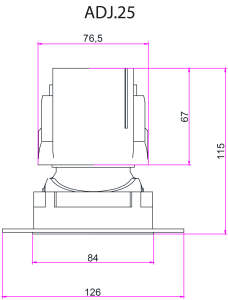

SECTION DRAWING SIDE VIEW ADJ 38D
CUT-OUT 84 MM

