

AVANTIX SOLO ADJSD.15W DALI

AVANTIX SOLO IP65 is an adjustable trim Square double downlight series has the light that doesn't just illuminate; it highlights, shadows, and evokes emotion.


Arch. Downlight

Downlight




Mounting Type	Recessed
Body Material	DIE-CAST Aluminum
Type Of Painting	Powder Coating
LGP Diffuser / Shade Material	Lens
LGP / Led Specs.	OSRAM GWKAFJB9.KM
Light Source	COB
Light Emission	45°, 36°, 24°
Light Control Type	Adjustable
UGR	<19
CRI	≥90 +
Color Temperature (CCT)	3000k, 4000k, 6000k
Lumen / Watt	≥135 Lm/W
Power	≥15W
Power Factor (PF)	>0.9
Operating Temperature	-25 ~ 60°
Life-Span / Warranty	50,000hS
Power Input Type / Driver AC / DC / Hz	AC220V, 50-60Hz
Driver brands	EAGLERISE, LIFUD, EUCHIPS
Power Supply Type	ON/OFF, DALI

ADJ.15

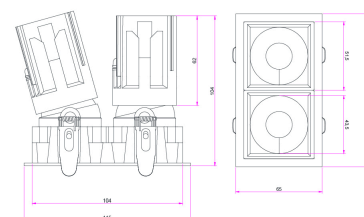

SECTION DRAWING SIDE VIEW ADJ 38D
CUT-OUT 44x104 MM

ADJ.30

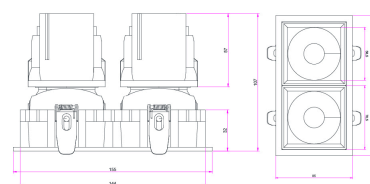


SECTION DRAWING SIDE VIEW ADJ 38D
CUT-OUT 70x155 MM



IP Rating	IP65
Available Accessories	INNER: DEEP/PINHOLE/SLOTTED/COMB
Application Environment	Residents, Office, Tower, Mall
Note:	Order Code Reference: SO.ADJSD+ (P+MT+DEGREE+PT+CCT)
Power / Dimension Option2	50W/210X105X124mm Cut-Out: 185x98mm
Power / Dimension Option3	30W/144X85X107mm Cut-Out: 145x78mm

ADJ.50

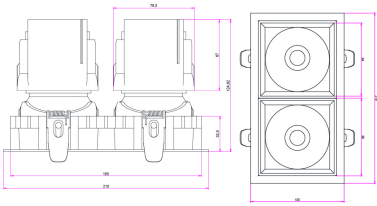

SECTION DRAWING SIDE VIEW ADJ 38D
CUT-OUT 90x185 MM

